


PENDITWIST

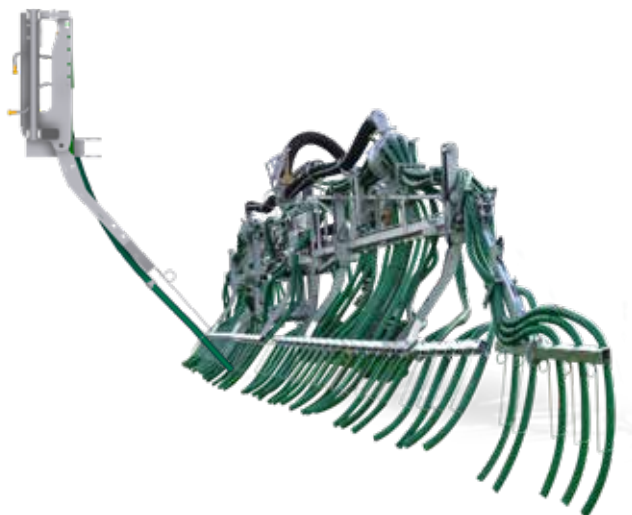

GENERAL POINTS

The PENDITWIST lays slurry directly on the ground through spreading pipes that are oriented backwards. Its spreading width can reach 18 m.

This boom has many applications. It makes it possible to lay slurry down without slowing down the growth of the plants and with no slurry residue in the forage: grass or maize silage, meadows, growing crops, etc.

NEW: the new JOSKIN spreading booms of 13.5 m and 16 m provide a wider choice of working widths. As a result, their users can divide the ground compaction and the ruts formation by two (since the sprayer drives in the same ruts).



PENDITWIST MODELS

Models	Spreading width (m)	Number of outlets	Spacing (cm)	Weight (kg)
90/RP1	9	30/36	30/25	1,050/1,100
120/RP2	12	40/48	30/25	1,140/1,220
135/RP2	13.5	46/54	30/25	1,290/1,370
150/RP2	15	50/60	30/25	1,470/1,560
160/RP2	16	54/64	30/25	1,500/1,530
180/RP2	18	60/72	30/25	1,590/1,620

VOGELSANG



GENERAL POINTS

VOGELSANG line spreading booms allow to spread on widths up to 36 m.

Despite their large working widths, they were designed so as to reduce the weight as much as possible and to guarantee a certain compactness during transport.

For an homogeneous slurry distribution in the line spreading hoses and a precise spreading, VOGELSANG booms are fitted with two macerators feeding 40 or 48 outlets.

TOPSWING

The ends are hydraulically folded to 180° and placed on the basis boom to reduce the transport width.

DROP-STOP

During transport on road, the line hoses are folded upwards to 180° to prevent the slurry from flowing on the road.



MODELS OF VOGELSANG LARGE WIDTH BOOMS

Models	Spreading width (m)	Number of hoses/outlets	Spacing (cm)	Weight (kg)
SwingMax3	21	80	26	2,200
SwingMax3	24	80	30	2,500
SwingMax3	27	96	28	2,800
SwingMax3	30	96	31	3,100

Note: consult us for lengths of 33 and 36 m.