

# Rapide

10 series



**Schuitemaker**

Master your Forage





Schuitmaker

RAPID

# Reliable foraging

at the moments that matter

As a livestock farmer or contractor you want to rely on your machines. You want to perform to the maximum, independent of the conditions.

In 1986 Schuitemaker released the world's first dual-purpose loader wagon. Since then, livestock farmers and contractors have only needed one wagon for both grass and maize. Efficiently deployable throughout the harvesting season with just one smart investment.

Thanks to the unique concept of the Schuitemaker Trailing pick-up, the Schuitemaker Rapide loader wagon has a compact construction and maximum ground clearance. Therefore we can proudly say that we are still the inventors of **the one and only dual-purpose loader wagon.**





# Our unique Rapide concept

compact with maximum ground clearance

## Over 30 years proven foraging results

The Schuitemaker Rapide is equipped with a trailing pick-up as standard. A unique technology in which the pick-up is positioned under the wagon. As a result, the wagon construction is more compact with the same load volume and you have maximum ground clearance for silage work.

Unlike a stinged pick-up, the Schuitemaker Trailing pick-up runs smoothly over a bumpy field and swivels out of the way when it encounters obstacles. This gives you the best surface adaption and a guaranteed clean crop flow. In addition, the 1.80 m wide pick-up enables you to pick up faster and cleaner.

The combination of the unique Schuitemaker Trailing pick-up, the RapidFlow feed roller and the powerful, smooth PowerRotor, makes the loading process even easier, more economical and more efficient than ever before. **This way you effortlessly achieve the optimal result.**



*RapidFlow for optimal crop flow*



*Open rear side for easy maintenance*









**Top quality**  
Forage




# Powerrotor

the optimum rotor in  
all circumstances

The Schuitemaker PowerRotor makes the process of foraging smoother, even in the toughest conditions. This means a minimum power requirement and lower fuel consumption.

The optimal rotor shape was developed after much research and field testing. Thanks to the optimized tooth shape, less pressure is exerted on the front wall, resulting in a long service life for the Schuitemaker Rapide.

**All this while maintaining the excellent cutting quality you expect from a Schuitemaker.**

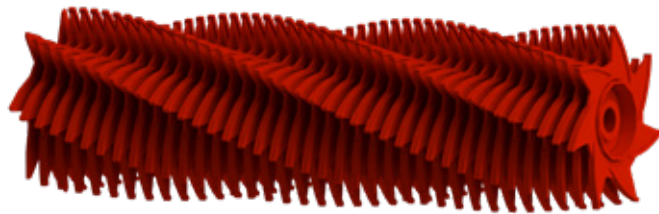

# Efficient and fresh feeding

## with the Rapide V

The Schuitemaker Rapide is also available in a feeding wagon variant, which makes it possible to feed the cows fresh grass every day. This allows you to achieve high efficiency in the mineral cycle and perfect protein utilization from your own crop.

The Schuitemaker Rapide V versions have three rollers as standard that, in combination with the cross conveyor belt, distribute the crop evenly at the feed fence. This makes the Rapide even more versatile.







Schuitemaker

25

Schuitemaker



# Control box

## clear and intelligent

The combination of the user-friendly joysticks and the intelligent control screen ensure that the Schuitemaker Rapide is easy to use. This allows you to fully focus on the loading process.

When unloading, the position of the tailgate is indicated on the control box and you can set automatic functions yourself. To avoid dangerous situations, the control box is protected against erroneous operation. The Schuitemaker Controlbox is a compact control screen which can also be linked to Isobus control.





# Technical specifications

		RAPIDE 10 SERIES			
TYPE:		55	65	75	85
Multi-purpose		Yes	Yes	No	No
Volume DIN, standard		27	33	44	49
Total dimensions	Length	842	942	1042	1142
	Width	250	250	250	250
	Height	334	334	365	365
Box dimensions	Length	643	743	843	943
	Width	220	220	220	220
	Height	206	206	216	216
Pick-up width		180	180	180	180
Cutting length		4,4	4,4	4,4	4,4
Track width		1900	1900	2000	2000
Tandem (technical capacity)	Tons	18	18	20	20
Loading capacity	Tons	10	10	10	10
Max. tire height		117	117	117	117
Airbrakes		●	●	●	●
Electric airbrake control		●	●	-	-
Automatic airbrake control		-	-	●	●
Automatic airbrake control		●	●	●	●
Ball coupling K80		○	○	○	○
3 sectional knifebar		○	○	○	○
RapidFlow Intake roller		○	○	○	○
Additional roller for loading fresh or short grass		○	○	○	○
Weighing system		○	○	○	○

		RAPIDE 10 SERIES			
TANDEM		55	65	75	85
18 tons following steered pendeltandem		●	●	-	-
18 tons forced steered pendeltandem		○	○	-	-
20 tons parabolic suspended following steered pendeltandem		-	-	●	●
20 tons parabolic suspended forced steered pendeltandem		-	-	○	○

Explanation of symbols: ● = Standard ○ = Optional - = Not available

All data has been compiled with the greatest possible care but are non-binding. Changes in construction/design are always possible.



# Schuitemaker

Master your Forage

EN

Morsweg 18 T +31 (0) 548 - 51 41 25  
7461 AG Rijssen E info@svgroup.nl

[veenhuis.com](http://veenhuis.com) • [svgroup.nl](http://svgroup.nl)

 **SV**group  
**Schuitemaker**  **veenHUIS**